Technical Manual

KAPPA–400 Left HCA

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

* Nominal Impedance:	6 ohm
* Recommended Amp Power:	35–150W
* Frequency Response:	40 Hz – 27 kHz –
* Sensitivity:	90 dB / 2,83V / 1 m
* Crossover frequency:	100 Hz & 3 kHz

SYSTEM COMPONENTS:

* Cabinet	CKAPPA–400 Left HCA (Not for sale)
* Grille:	GKAPPA–400 HCA (2400770)
* Grille:	GKAPPA–400 HCA (2400780) Left
* Grille:	GKAPPA–400 HCA (2400790) Right
* Woofer	G1306A–L 170mm Woofer (26mm voice coil)
DC Resistance:	4,3 ohm
* Woofer	G1308A 200mm Woofer (36mm voice coil)
DC Resistance:	7,2 ohm

SYSTEM COMPONENTS: (cont'd)

* Tweeter	A1301A 25mm Ceramic Dome Tweeter
DC Resistance:	3,6 ohm
* Crossover Network:	NKAPPA–400 HCA (2700780)

PHYSICAL SPECIFICATIONS:

* Enclosure Dimensions (H.W.D):	33,46x8,66x16,14 In. D (850x220x410mm D)
* Shipping Weight:	61,81 lbs. (28 kg.)

WARRANTY INFORMATION:

* Refer to the Warranty Statement packed with each product

PACKAGE

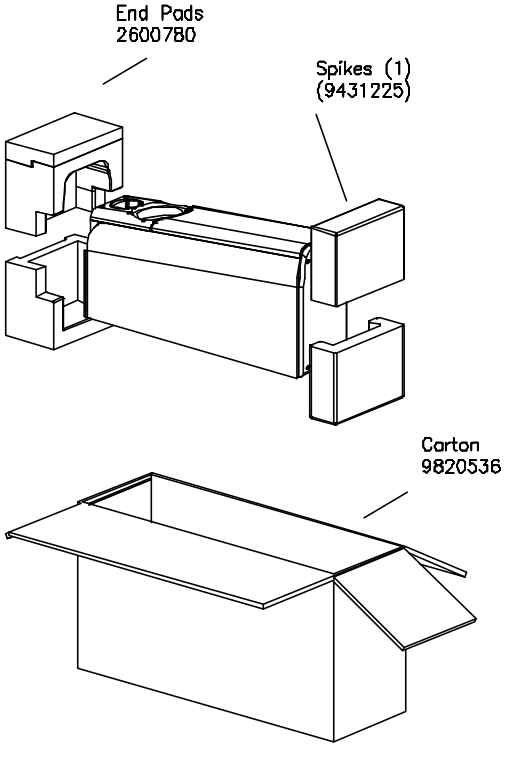

SCHEMATIC

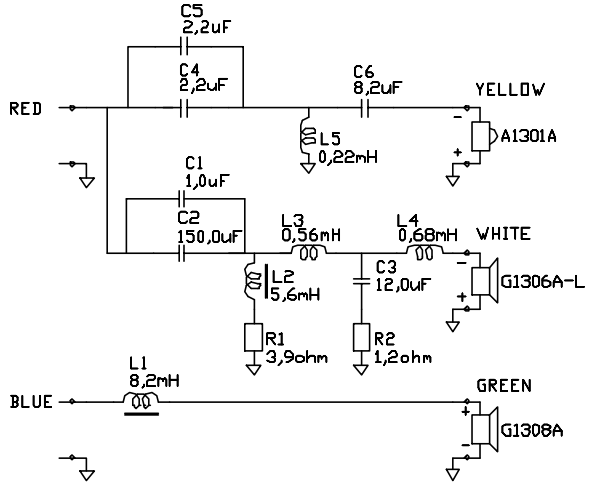

NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.

DEFECTIVE DRIVER SHOULD BE REPLACED.

KAPPA–400 Left HCA

Valid fron serial no. 01001
Rev. 06.08.2002

COMPONENT EXPLODED VIEW

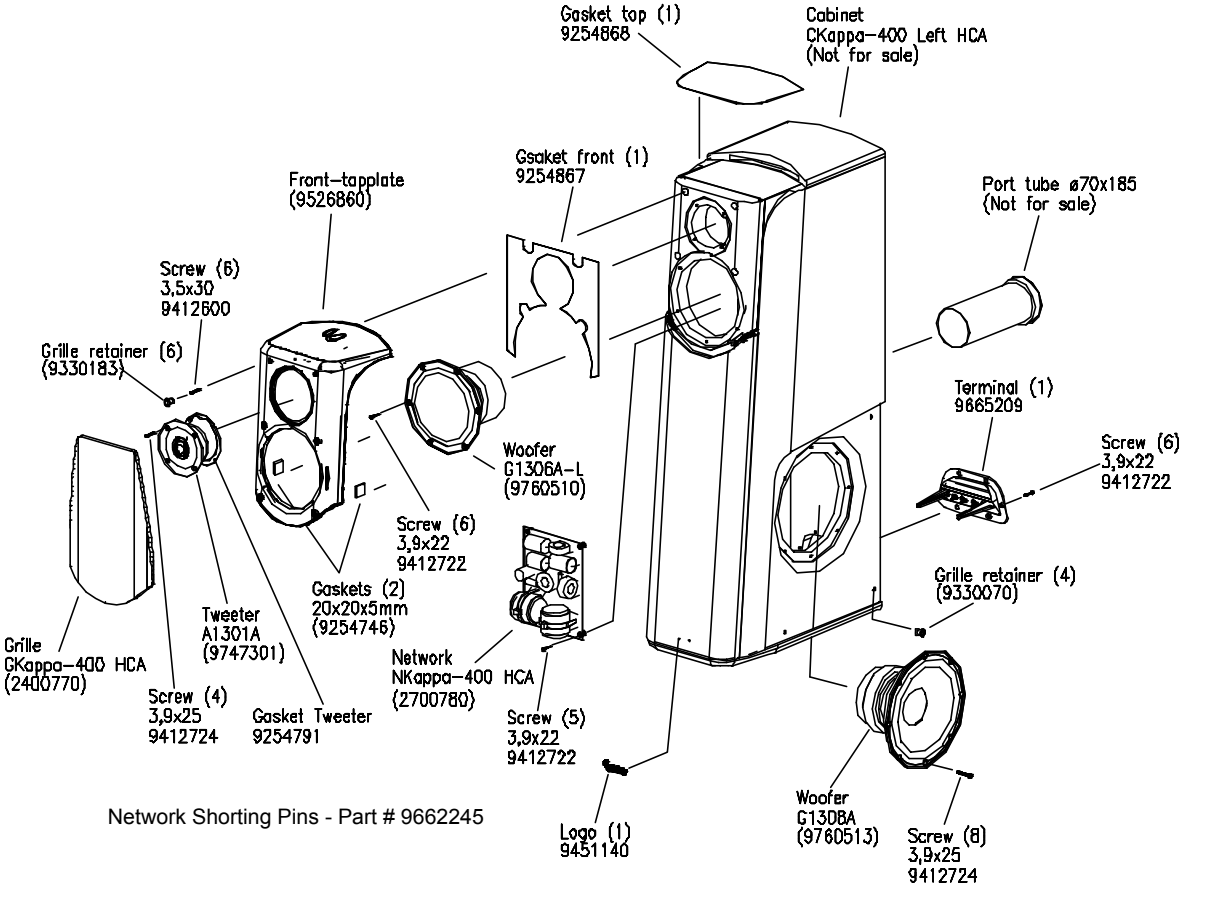

Network Shorting Pins - Part # 9662245

Spike	(4)	(9431225)
Cone nut	(4)	